



STIHL USG

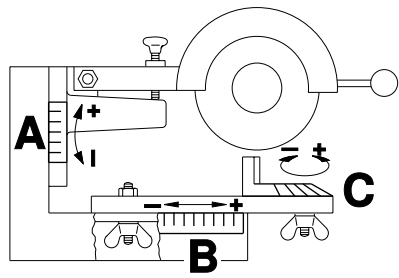

STIHL®

 $t = a : 2$ mm inch		 A	 B	 C			
6,35 1/4 9,32 3/8 P		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5203 750 7013 5203 750 7015	2,0 10°	1110 893 4000
9,32 3/8 P Picco-Mini		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5203 750 7013 5203 750 7015	2,0 10°	0000 893 4000
8,25 0.325		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5203 750 7010 5203 750 7015	2,4 10°	1110 893 4000
9,32 3/8		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5203 750 7010 5203 750 7015	2,6 10°	1110 893 4000
10,26 0.404		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5202 750 7010 5203 750 7015	2,8 10°	1106 893 4000
9,32 3/8 P PMX 		+40° / +40° +40°	+15 / -15 0	+10° / -10° 0°	5203 750 7013 5203 750 7015	2,0 10°	1110 893 4000
9,32 3/8 RMX 		+40° / +40° +40°	+15 / -15 0	+10° / -10° 0°	5203 750 7010 5203 750 7015	2,6 10°	1110 893 4000
10,26 0.404 RCX / RMX 		+40° / +40° +40°	+15 / -15 0	+10° / -10° 0°	5202 750 7010 5203 750 7015	2,8 10°	1106 893 4000
10,26 0.404 RMH 		+40° / +40° +40°	+15 / -15 0	+30° / -30° 0°	5202 750 7010 5203 750 7015	2,8 10°	
9,32 3/8 Rapid-Duro		+20° / +20° +40°	0 / 0 0	+20° / -20° 0°	5203 757 0901 5203 750 7015	- 10°	1110 893 4000



5203 893 6306

0457 716 0000 BL A03